



**ANY JOB.
ANY SIZE.
ANY PLACE.**

60 Years of American Ingenuity

GV180



The **GV180 Gas Vacuum** is designed with a steel fan and chamber, powered by a rugged 18 hp Briggs & Stratton V-Twin engine. This vacuum is intended for removing all types of blown insulation and for recycling damp spray.

- 6" (15.2 cm) inlet and outlet allows for substantial volume
- Engineered and designed to eliminate engine vibration and fan blade stress
- 12 volt Magnetron[®] Electronic Ignition system
- Input / Output safety switches
- Mounting frame w/ 11" run flat tires
- Hour meter / tachometer monitors the use and rpm of the engine
- Abrasion resistant steel fan chamber
- Durable powder coat finish

PRODUCTION RATE
EXTRACTS ON AVERAGE
233/BAGS per hr.

Backed by a manufacturer's

2-YEAR WARRANTY - Made in the U.S.A.

60 Years



1958-2018 krendlmachine.com

KRENDL MACHINE COMPANY • 1201 SPENCERVILLE RD • DELPHOS, OHIO 45833 • 800.459.2069 • F 419.695.9301



KRENDL

The Innovator in Insulation Equipment™

GV180

Scan to learn more about Krendl Machine

GAS VACUUM - THEORY OF OPERATION

This unit is designed to accept all recycled fiber materials from the job site and deliver them directly into the vacuum hopper. Once the recycled material has been deposited into the hopper, the air passes through the perforated mesh screen in the vacuum hopper, where it is filtered and exhausted.

FEATURES:

Automatic shut-off, if the hose detaches during operation

VACUUM SPECIFICATIONS

FAN SIZE / TYPE **LARGE STEEL, 18" (46cm)**

PRODUCTION **7000 lbs./hr**


INLET / OUTLET **6" (15.2 cm)**
inches (cm)

GENERAL SPECIFICATIONS

DIMENSIONS **36"L x 32"W x 46"H (91cm x 81cm x 117cm)**

WEIGHT **262 lbs. (119kg.)**

MOTOR **18 hp/3400rpm (no load)**

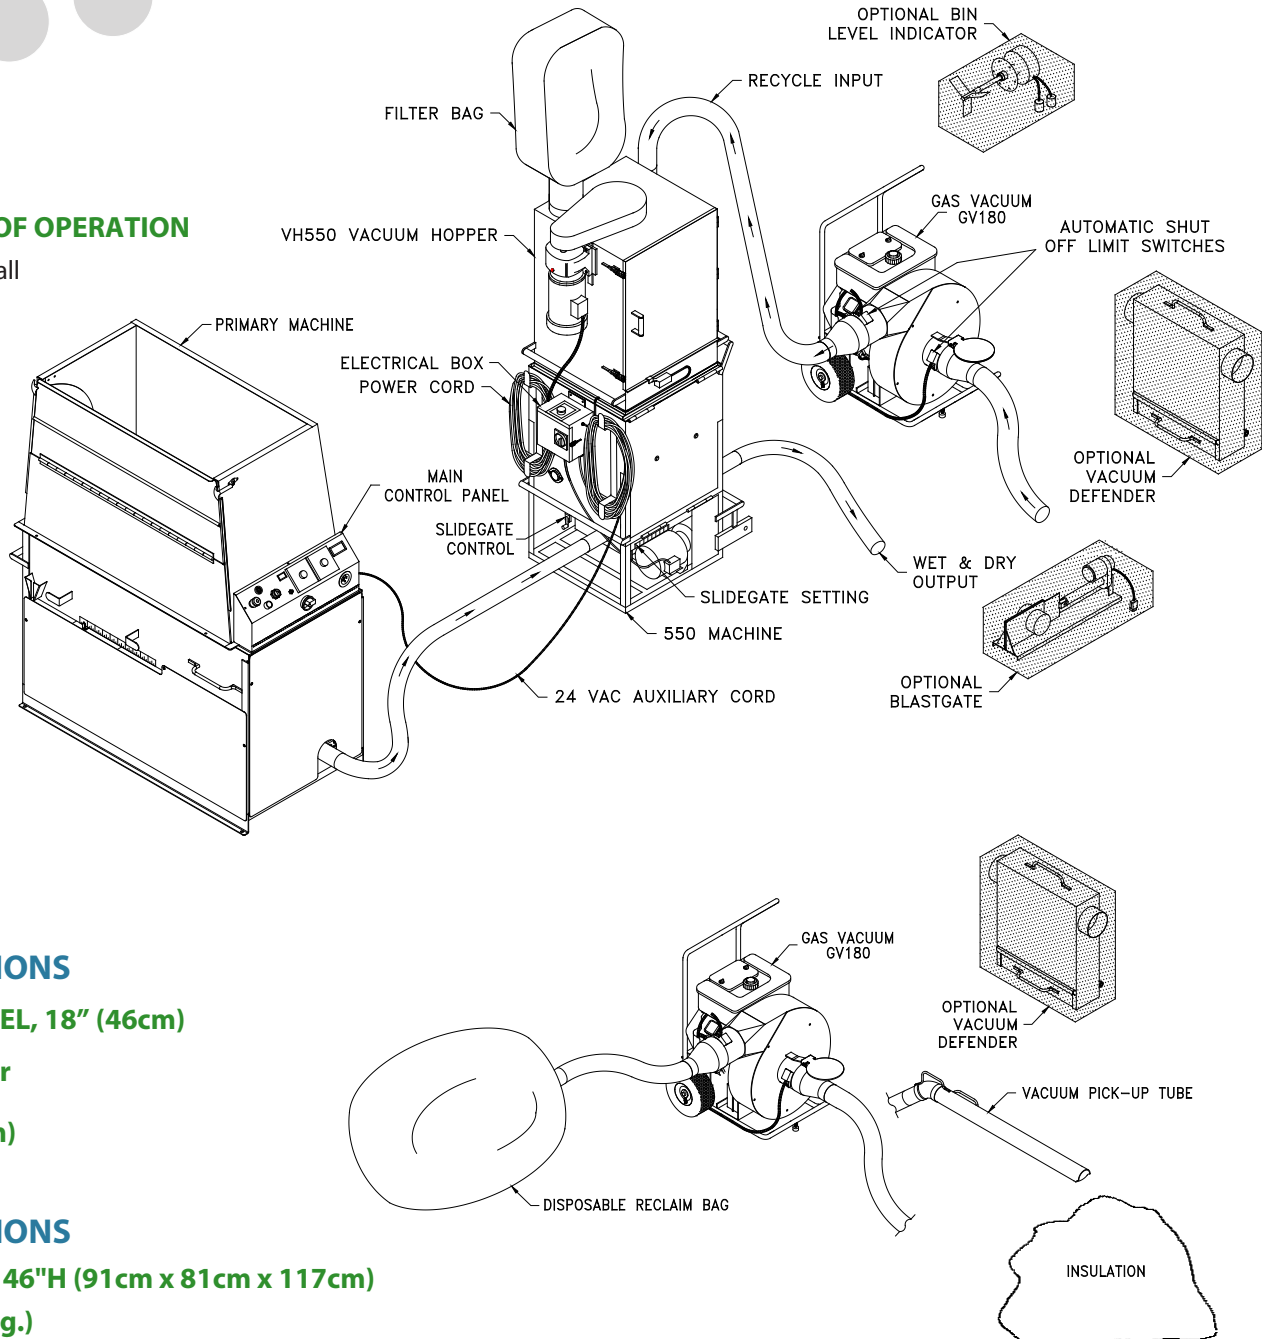

Waste material can be discharged into a disposable reclaim bag.