



UNIVERSAL CLEANER

UNIVERSAL CLEANER is designed to clean, protect and extend the working life of foam guns, can valves, and dispensing equipment. TYTAN Cleaner's environmentally friendly formula is also designed to prepare surface applications to enhance adhesion, dissolve wet polyurethane foams and polyurethane adhesives before they cure. TYTAN Cleaner does not contain formaldehydes or CFCs.

FEATURES


- ⇒ 50% less Acetone – safer for PVC surfaces
- ⇒ Superb for cleaning and dissolving uncured polyurethane foam, sealants and adhesives
- ⇒ Excellent for surface preparation for enhanced adhesion.
- ⇒ Essential for cleaning, maintenance and proper function of foam guns
- ⇒ Prevents sealing of can valves between uses.
- ⇒ Shelf life 36 months

APPLICATIONS

- ⇒ Dissolving uncured one-component polyurethane foams and adhesives
- ⇒ Cleaning of dispensing equipment
- ⇒ Degreasing metal surfaces prior to the application of silicones or foams

Always read all operating, application and safety instructions before using any products from Selena Group. Use in conformance with all local, state and federal regulations and safety requirements. Read all product directions and safety information before use.

APPLICATION INSTRUCTION

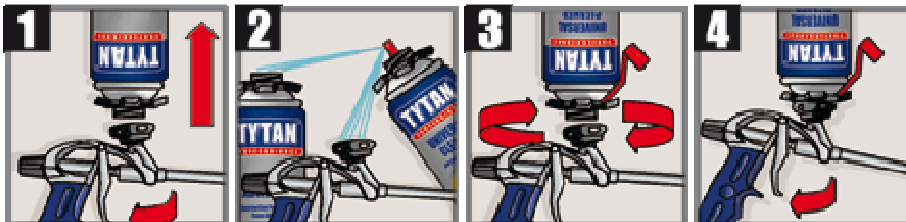

1. Wear work clothes, gloves and eye protection. Use only with adequate ventilation or wear approved respiratory equipment.
2. Product is **FLAMMABLE DURING DISPENSING**. Keep away from all flames, burners, stoves, heaters, pilot lights, and disconnect all electrical motors and appliances before use and until all vapors are gone. Do not smoke, use matches or lighter while using the product. Read all instructions and safety information prior to use of any product.
3. Shake can 30-45 seconds before attaching to TYTAN foam gun or spraying.
4. Remove protective cap, invert can and screw can firmly onto recommended TYTAN gun – Do not over-tighten.
5. If using to prepare surfaces or general cleaning, attach enclosed nozzle, pointing opening in a safe direction. Aim towards the surface to be cleaned, slowly depress red nozzle to spray the cleaner. In case of delicate surfaces or fabrics, test a controlled and non-exposed area for evaluation.
6. It is recommended to clean the foam gun after every use.
7. Point gun in safe direction and carefully pull the trigger until solvent extrudes from the gun tip. Release the trigger and let cleaning agent soak in for one to two minutes. Pull the trigger again and dispense residue into suitable container. If necessary repeat procedure two or three times until clear cleaning agent appears from the barrel.



TECHNICAL DATA SHEET

NOTES:

- ⇒ Clean TYTAN Foam Gun thoroughly with TYTAN CLEANER immediately after use to prevent foam from hardening in gun.
- ⇒ Uncured Foam - Clean immediately with TYTAN CLEANER.
- ⇒ Cured Foam - if hardened on skin - use an industrial cleaner with pumice. Repeat process until foam is removed. Cured foam must be mechanically removed or allowed to wear off in time.

SHELF LIFE, STORAGE AND LOGISTIC

When stored properly, shelf life is **36 months** from production date, printed on the bottom of each can. Store upright in cool and dry area at temperatures 41°F to 86°F/ 5°C to 30°C. Do not expose to open flame or temperatures above 120°F/ 50°C. Keep away from open flame.

Product code	Size	Packaging	Case Pack
TYT 0799	12 Oz.(340g)	Aerosol Can	12

SAFETY AND WARRANTY

CAUTION: CONTAINER MAY BURST IF HEATED

SAFETY: HARMFUL CONTENTS UNDER PRESSURE. CONTAINS FLAMMABLE GAS. SHUT OFF ALL GAS PILOT LIGHTS, ELECTRICAL IGNITERS, BURNERS AND OTHER SOURCES OF HEAT BEFORE AND DURING USE. DO NOT SMOKE OR USE MATCHES, LIGHTERS WHILE DISPENSING CLEANER. **Contents may burst if left in areas susceptible to extremely high temperatures. Do not place in Hot water.** DO NOT PLACE OR STORE IN A CLOSED AREA SUCH AS A CAR. USE ONLY IN WELL VENTILATED AREAS. AVOID CONTACT WITH SKIN OR EYES. WEARING PROTECTIVE EYEWEAR AND GLOVES IS RECOMMENDED. DO NOT BREATHE VAPOR/SPRAY. DO NOT INCINERATE, PUNCTURE, OR EXPOSE CAN TO DIRECT SUNLIGHT FOR LONG PERIODS OR STORE AT TEMPERATURES OVER 120°F/50°C. **KEEP OUT OF REACH OF CHILDREN.**

FIRST AID: In case of eye contact, flush **immediately** with water for 15 minutes and **get medical help**. If inhalation causes physical discomfort, move to fresh air. If discomfort persists or any breathing difficulty occurs, **get medical help**. If swallowed, drink large quantities of water. DO NOT induce vomiting. **GET PHYSICIAN ASSISTANCE IN ALL CASES.**

INGREDIENTS: Acetone (CAS No: 67-64-1), ethyl acetate (CAS No: 141-78-6), propan-2-ol (CAS No: 67-63-0) to 75%, Propane/ Butane/ isobutene (CAS No: 74-98-6 106-97-8 75-28-5) to 25%.

Always read all operating, application, and safety instructions before using any products from Selena USA, Inc. Use in compliance with all local, state, and federal regulations and safety requirements. Read all product directions and safety information before use.

DISPOSAL OF PRODUCT AND CONTAINERS: Each person, firm, or corporation engaged in the application, installation, disposal, or any other use of these materials shall carefully and precisely determine all potential hazards associated with such products in specific usage, and utilize all appropriate precautionary and safety measures as outlined in local, state, and federal regulations governing the use or disposal of product or empty containers.

LIMITED WARRANTY: Selena USA, Inc. warrants its products to be free of manufacturing defects due to workmanship and materials for the duration of and in accordance to the conditions stated in the individual Technical Data Sheets. This warranty is limited to the replacement of the product when such product proves to be defective in manufacture. This express warranty will only apply if the product is stored as specified and used in accordance for its intended purposes. It does not apply to failures due to improper application. Selena Group disclaims all other warranties, expressed or implied, as well as liability for any incidental or consequential damages. The liability extent of both manufacturer and seller is limited to replacement of product only.

With the publication of this Technical Data Sheet, previous editions are no longer valid. Due to continuous product and process improvements, specifications and prices are subject to change without notice.

The company shall not be liable, in any event for any incidental, consequential, special, or indirect damages or damages to a structure or its contents from any cause whatsoever. This warranty may not be modified or amended by any employee, representative agent or customer of Selena Group. This warranty is exclusive and is in lieu of all other warranties, express, or implied, including any implied warranty of merchantability or fitness for particular purpose. The extent of liability for breach of such warranty is limited to replacement of product only.