

HC 314 PP Tape

PRODUCT DATA SHEET




CONSTRUCTION

Substrate: Polypropylene
Adhesive: Acrylic
Liner: None

FEATURES

- Adheres well to housewraps
- Excellent seam tape for extruded foam products
- Bonds well over a wide range of environmental conditions

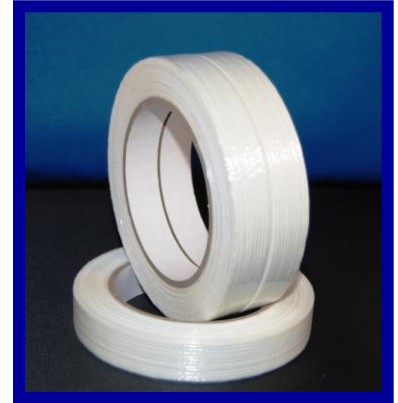

TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness	0.003-in	0.102-mm	PSTC-133
Peel Adhesion to Stainless Steel	40-oz/in	5.3-N/cm	PSTC-101
Tensile Strength	24-lbs/in	175-N/cm	PSTC-131
Elongation	125.0%	3.0%	PSTC-131

APPLICATION

Application surface must be clean, dry and free of contaminants.

SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 4.28.2011 13:37.